


| REV | DATE       | CONTENT       |
|-----|------------|---------------|
| V1  | 2018.10.30 | First release |

# PIN Definition


| PIN | SIGNAL |
|-----|--------|
| 1   | CS1    |
| 2   | RST    |
| 3   | A0     |
| 4   | /WR    |
| 5   | /RD    |
| 6   | D0     |
| 7   | D1     |
| 8   | D2     |
| 9   | D3     |
| 10  | D4     |
| 11  | D5     |
| 12  | D6     |
| 13  | D7     |
| 14  | VDD    |
| 15  | VSS    |
| 16  | NC     |
| 17  | NC     |
| 18  | V0     |
| 19  | XV0    |
| 20  | NC     |
| 21  | NC     |
| 22  | VG     |
| 23  | NC     |
| 24  | NC     |
| 25  | NC     |
| 26  | NC     |
| 27  | NC     |
| 28  | G86    |
| 29  | PS     |
| 30  | NC     |

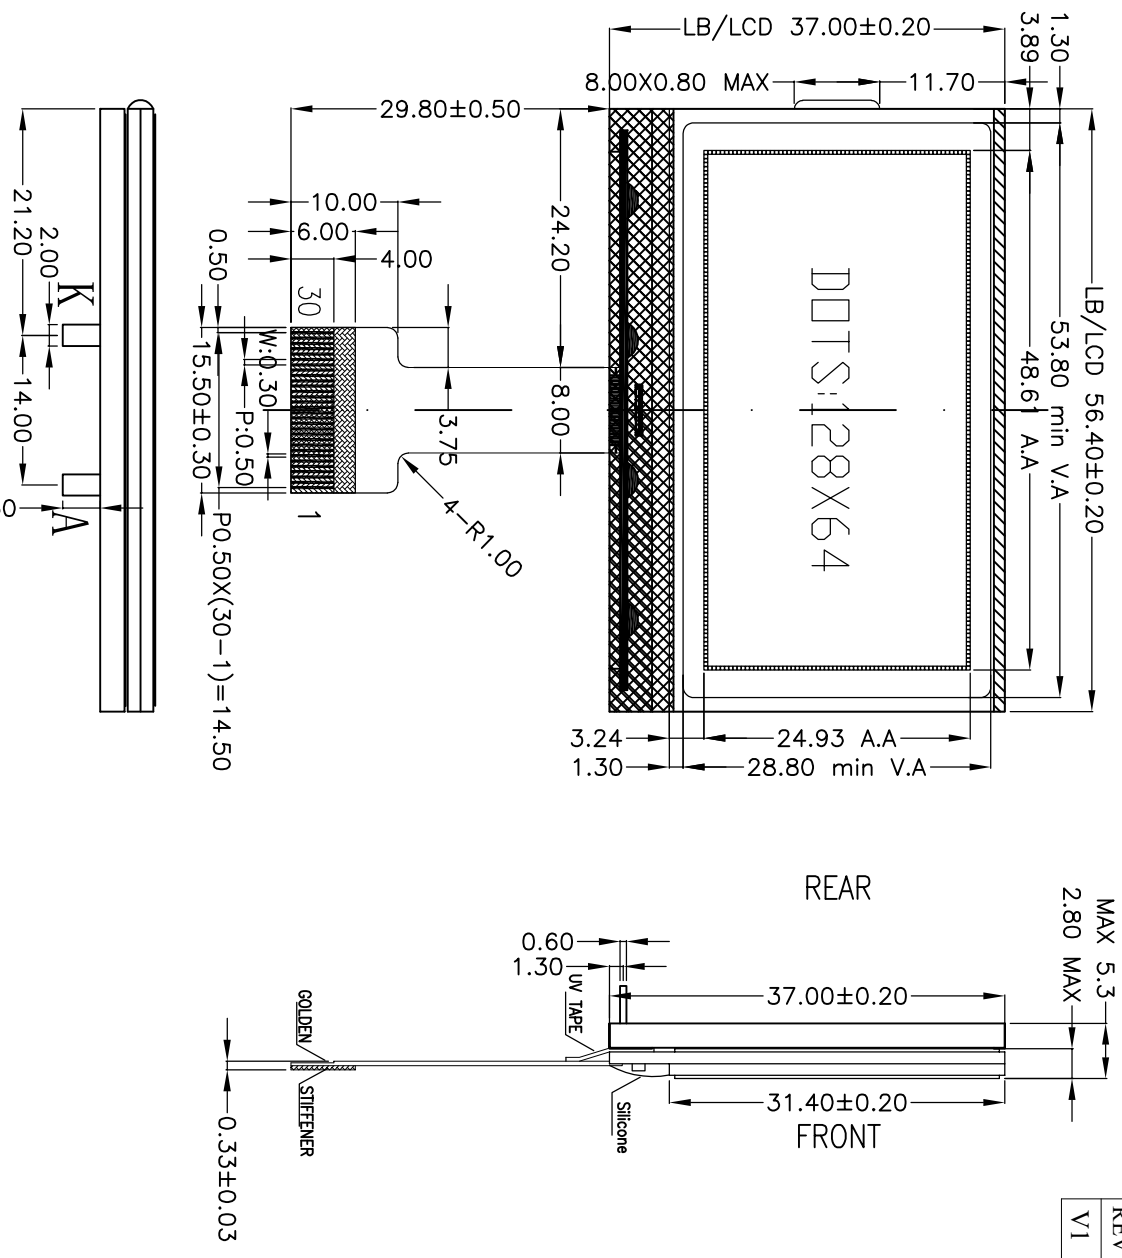

|    |                            |                 |
|----|----------------------------|-----------------|
| 1  | Lcd Type                   | FSTN,NPOSITIVE  |
| 2  | Viewing Direction          | 6 O'clock       |
| 3  | Drive Method               | 1/65D,1/9B      |
| 4  | Polstrizer Mode            | TRANSFLECTIVE   |
| 5  | VDD/VOP                    | VOP9.8V/VDD3.0V |
| 6  | Operating Temperature      | -10°C~60°C      |
| 7  | Storage Temperature        | -20°C~60°C      |
| 8  | IC                         |                 |
| 9  | Backlight                  | White           |
| 10 | Environmental requirements | ROHS compliance |

## 电路CIRCUIT DIAGRAM

(LED SMD 1 X 4 = 4 dies)

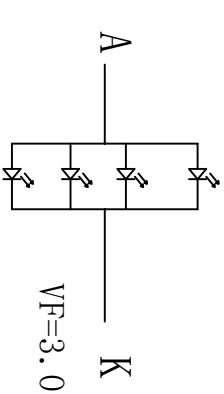

VF=3.0±0.2V, IF=60mA

The non-specified tolerance of dimension is±0.3mm.

|         |                  |       |     |
|---------|------------------|-------|-----|
| SCALE:  | 1/1              | UNIT: | mm  |
| REV:    | V1               | PAGE: | 1/1 |
| DRAW    | Xia Hang         |       |     |
| CHECK   |                  |       |     |
| APPROVE |                  |       |     |
| MODEL   | HZY Display CO., |       |     |
| TITLE   | LCM DRAWING      |       |     |
|         | HO12864F-WFH-00  |       |     |