
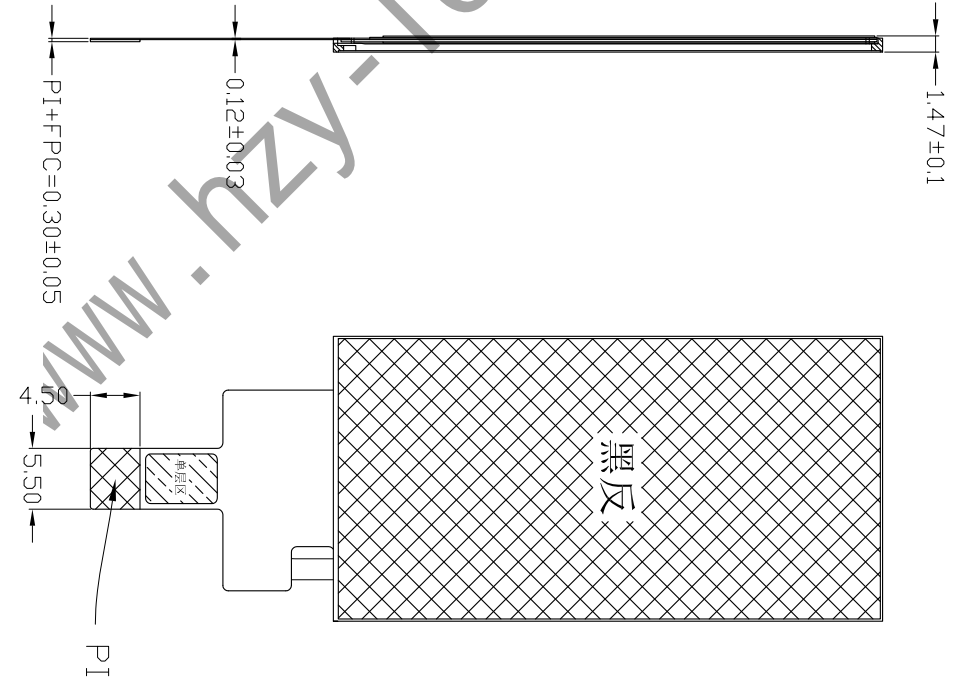


ROSH

Revision	Description	Date	Signed
V0	首次发行	24.10.16	Pengliz

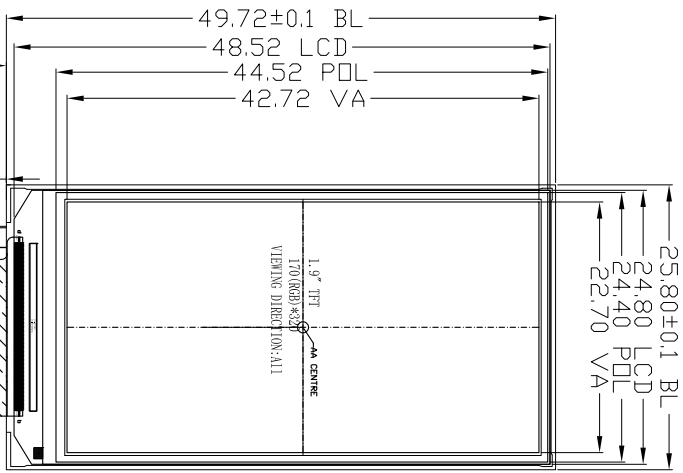


PIN	DESCRIPTION
1	LEDA
2	LEDK
3	GND
4	RESET
5	CS
6	SCL
7	RS
8	SDA
9	GND
10	VCC

4-SPI

NOTES:

1. DISPLAY TYPE: 1.9" TFT, TRANSMISSIVE Normally Black
2. DRIVER IC: ST7789P3 or compatible
3. VIEWING DIRECTION: All
4. BACKLIGHT: 4 pcs White LED
5. BRIGHTNESS: 500cd/m² (typ)
6. INPUT VOLTAGE: VCC 2.8V (typ)
7. OPERATING TEMP: -20° C ~ +70° C
8. STORAGE TEMP: -30° C ~ +80° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
10. ROHS COMPLIABLY



深圳市华之洋光电科技有限公司
SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD

Customer Ref.	Model No.	Drawing Title	Unmarked Tolerance	Unit	Scale	Page
---	---	HZ019QPTS02-A0	±0.2	mm	--	1 of 1
Part No.	Approve	Material	LCM	Date	2024.10.16	Rev 00
---	Checked	---	---	Draw	Pengliz	---
Drawing No.	---	---	---	---	---	---

