
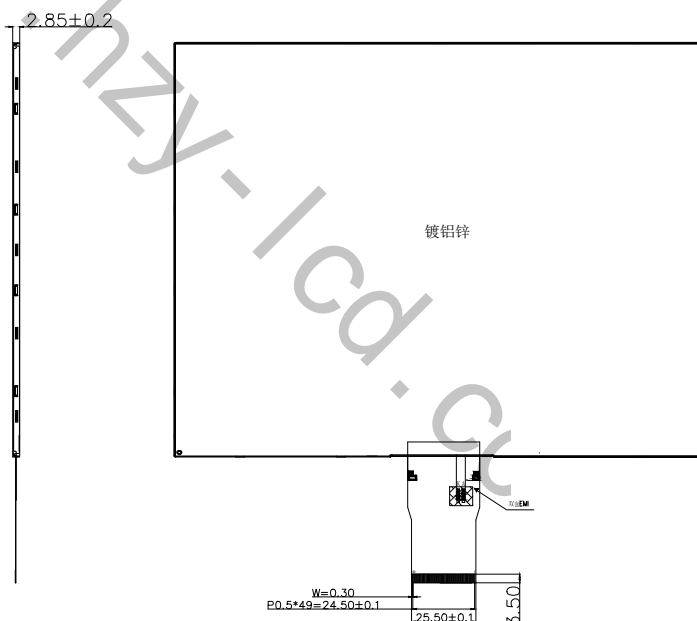


ROSH

Reversion	Discription	Date	Signed
A0	First	24.01.29	Allen

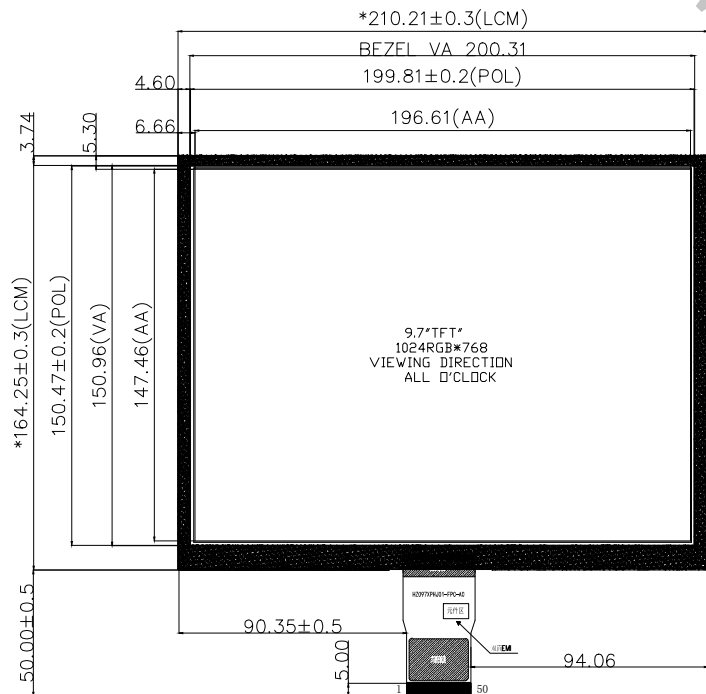


PIN DESCRIPTION

1~2	LED+
3~4	LED-
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VS
11	HS
12~19	B7~B0
20~27	G7~G0
28~35	R7~R0
36	GND
37	DCLK
38	GND
39	L/R
40	U/D
41	VGH
42	VGL
43	AVDD
44	RESET
45	NC
46	VCOM
47	STBYB
48	GND
49	NC
50	NC

NOTES:

1. DISPLAY TYPE: 9.7" TFT, TRANSMISSIVE
2. DRIVER IC: JD9165A
3. VIEWING DIRECTION: ALL
4. BACKLIGHT: 36 pcs White LED
5. BRIGHTNESS: 300 cd/m<sup>2</sup>(TYP)
6. INPUT CURRENT: VCC 3.0V(TYP)
7. OPERATING TEMP: -20° C ~ +70° C
8. STORAGE TEMP: -30° C ~ +80° C
9. UNDEFINED DIMENSION TOLERANCE: ±0.3mm
10. RoHS COMPLIABLY




**深圳市华之洋光电科技有限公司**  
 SHENZHEN HZY PHOTOELECTRIC TECHNOLOGY CO., LTD

Customer Ref.	Model No.	Drawing Title		HZ097XPHJ01-A0			
---	Approve	Material	Unmarked Tolerance	Unit	Scale	Page	
---	Checked	LCM	±0.3	mm	--	1 of 1	
---	Draw	Allen	Date	2024.01.29	Rev 00		