ROSH

Reversion	Dispcription	Date	Signed
01	First	2021.07.12	YP
02	更改金手指在反面及FPC左右长度	2021.11.19	YP

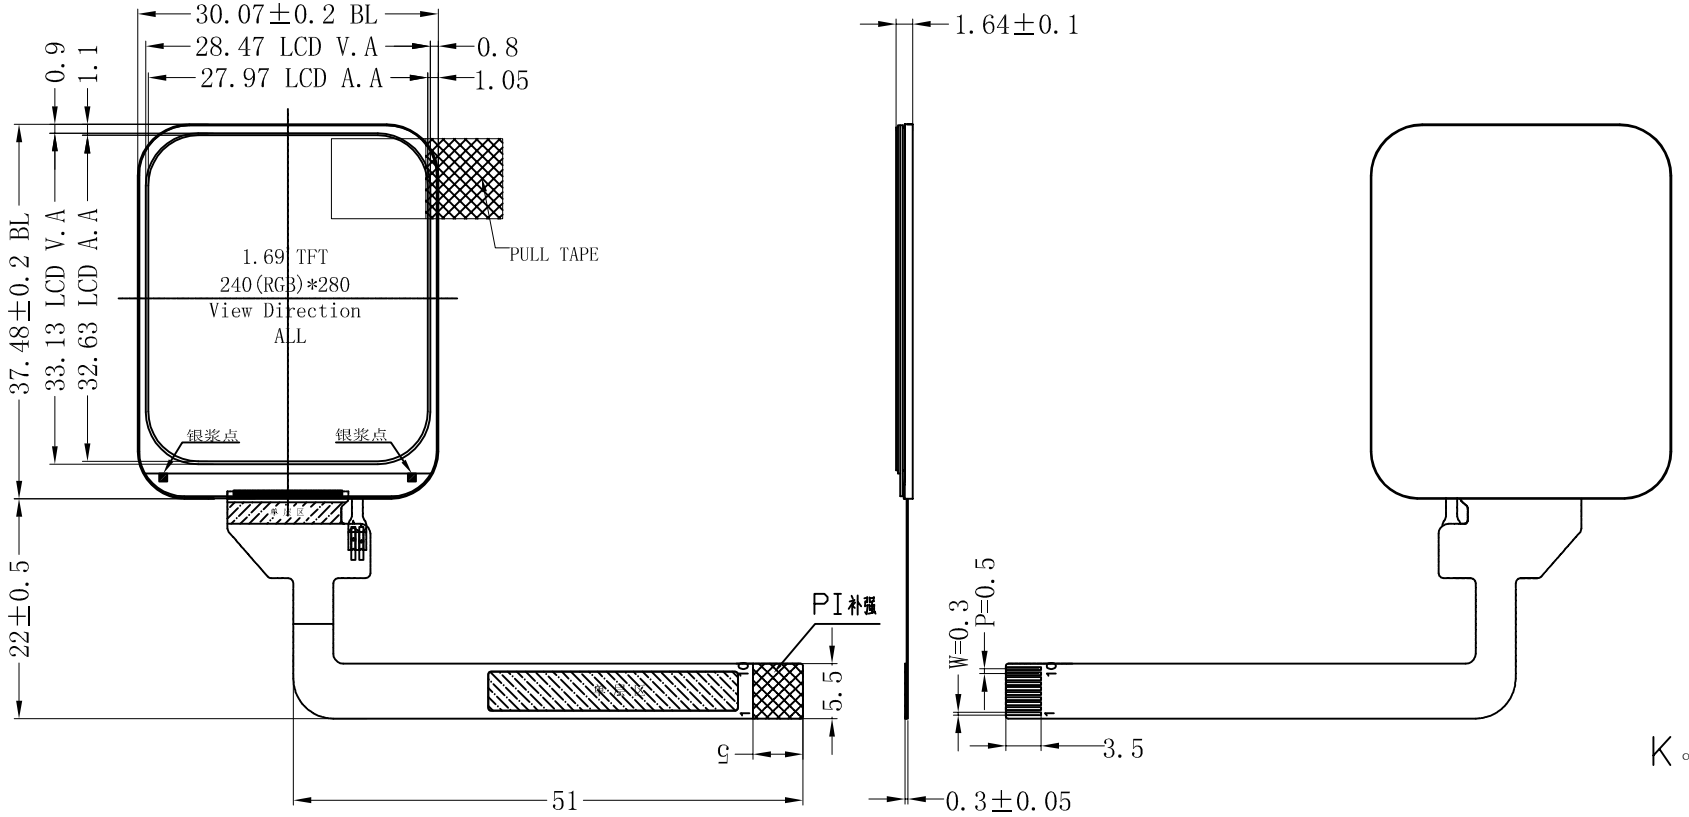

Pin.NO.	Name
1	GND
2	D/C
3	SCK
4	SDA
5	CS
6	RESET
7	LED_K
8	LED_A
9	VDDIO/1.8V
10	VDD/2.8V

4线1通道



VF=3.2V;IF=60mA

LED CIRCUIT DIAGRAM

NOTES:

1. DISPLAY TYPE:1.69″ TFT,TRANSMISSIVE
2. DRIVER IC:ST7789V2
3. VIEWING DIRECTION: ALL
4. BACKLIGHT: 3 pcs White LED
5. INPUT CURRENT: VCC 2.8V(type)
6. OPERATING TEMP: -20° C~ +70° C
7. STORAGE TEMP: -30° C~ +80° C
8. UNDEFINED DIMENSION TOLERANCE: ±0.2mm
9. RoHS COMPLIABLY

深圳市华之洋光电科技有限公司

ShenZhen HZY Photoelectric Technology Co.,Ltd

Custumer Ref.	Model No.		Drawing Title	HZ169VPHS01-A0			

Part No.	Approve		Material	Unmarked Tolerance	Unit	Scale	Page
---	Checked		LCM	±0.2	mm	--	1 of 1
Drawing No.							
---	Draw	YP	Date	2021.11.19	Rev 00		